

200-401^{Q&As}

Managing Industrial Networks with Cisco Networking Technologies
(IMINS)

Pass Cisco 200-401 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/200-401.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



QUESTION 1

What should be done with unused conductors in copper unshielded or shielded twisted-pair network cables?

- A. terminate in their characteristic impedance
- B. trim back and properly insulate
- C. connect to protective earth
- D. splice to a used conductor

Correct Answer: A

QUESTION 2

Why is SSH preferred over Telnet as a method of accessing a network device to alter or view the configuration?

- A. Telnet encrypts only the login information, not the entire transmission.
- B. SSH requires fewer network resources and no additional configuration.
- C. Telnet is more difficult to use and configure than SSH.
- D. SSH encrypts the login and session information.

Correct Answer: D

QUESTION 3


Which option allows an EtherNet/IP I/O device to be safely installed where it is subject to water immersion?

- A. The device is rated IP20 and the power wiring is installed securely to the terminal block.
- B. The device is rated IP67 and a power cordset is used.
- C. The device is rated IP67 and immersed to 10 m.
- D. The device is rated IP20 and immersed to 10 m.

Correct Answer: B

QUESTION 4

Exhibit:

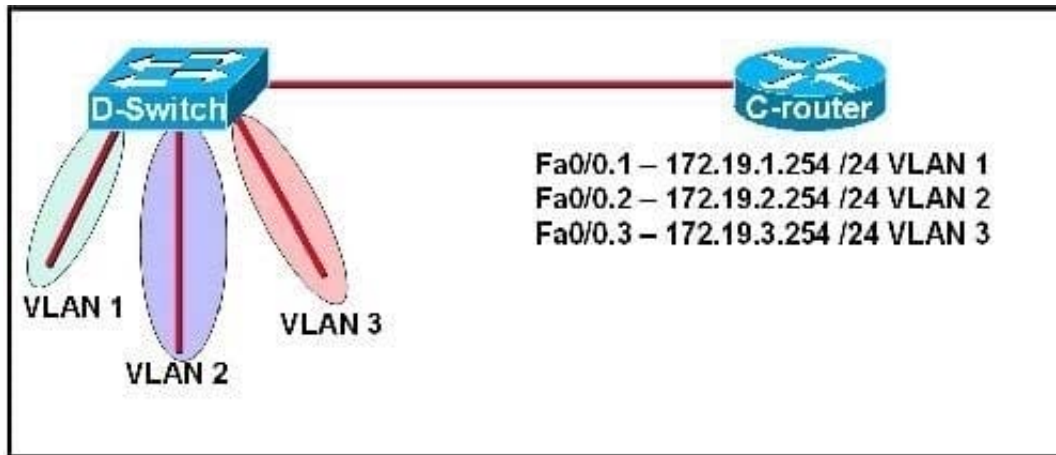

Refer to the exhibit. C-router is to be used as a "router-on-a-stick" to route between the VLANs. All the interfaces have been properly configured and IP routing is operational. The hosts in the VLANs have been configured with the appropriate default gateway. What is true about this configuration?

- A. These commands need to be added to the configuration:
 C-router(config)# router eigrp 123
 C-router (config-router)# network 172.19.0.0
- B. These commands need to be added to the configuration:
 C-router(config)# router ospf 1
 C-router (config-router)# network 172.19.0.0 0.0.3.255 area 0
- C. These commands need to be added to the configuration:
 C-router(config)# router rip
 C-router (config-router)# network 172.19.0.0
- D. No further routing configuration is required.

Correct Answer: D

QUESTION 5

What does the Cisco PSIRT issue for significant security issues that directly involve Cisco products and require an upgrade, fix, or other customer action?

- A. Cisco Security Advisories
- B. Cisco Security Responses
- C. Cisco Security Notices
- D. Cisco Security Bulletins

Correct Answer: A

[200-401 PDF Dumps](#)

[200-401 VCE Dumps](#)

[200-401 Exam Questions](#)