

640-822^{Q&As}

Interconnecting Cisco Networking Devices Part 1

Pass Cisco 640-822 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.lead4pass.com/640-822.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



https://www.lead4pass.com/640-822.html

2021 Latest lead4pass 640-822 PDF and VCE dumps Download

QUESTION 1

Which method of connecting a small office/home office to an ISP uses existing telephone lines?
--

- A. DSL
- B. cable
- C. serial
- D. CSU/DSU

Correct Answer: A

QUESTION 2

After the shutdown command has been issued on the serial 0/0 interface, what will be displayed when the show interface serial 0/0 command is issued by the administrator?

- A. Serial0/0 is administratively down, line protocol is down
- B. Serial0/0 is down, line protocol is down
- C. Serial0/0 is up, line protocol is down
- D. Serial0/0 is administratively down, line protocol is administratively down
- E. Serial0/0 is up, line protocol is up
- F. Serial0/0 is down, line protocol is up


Correct Answer: A

QUESTION 3

Refer to the exhibit.

https://www.lead4pass.com/640-822.html

2021 Latest lead4pass 640-822 PDF and VCE dumps Download

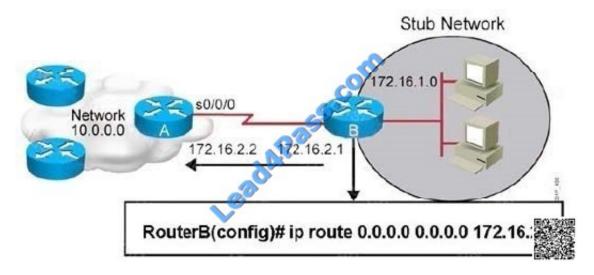


Which two statements are correct? (Choose two.)

- A. This is a default route.
- B. Adding the subnet mask is optional for the ip route command.
- C. This will allow any host on the 172.16.1.0 network to reach all known destinations beyond RouterA.
- D. This command is incorrect, it needs to specify the interface, such as s0/0/0 rather than an IP address.
- E. The same command needs to be entered on RouterA so that hosts on the 172.16.1.0 network can reach network 10.0.0.0.

Correct Answer: AC

QUESTION 4

An administrator cannot connect from R1 to R2. To troubleshoot this problem, the administrator has entered the command shown in the exhibit.

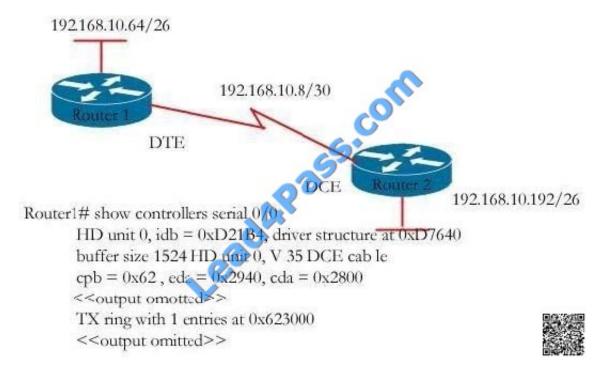


Based on the output shown, what could be the problem?

- A. The serial interface is configured for half duplex.
- B. The serial interface does not have a cable attached.
- C. The serial interface has the wrong type of cable attached.
- D. The serial interface is configured for the wrong frame size.
- E. The serial interface has a full buffer.

Correct Answer: C

QUESTION 5

Refer to the exhibit.

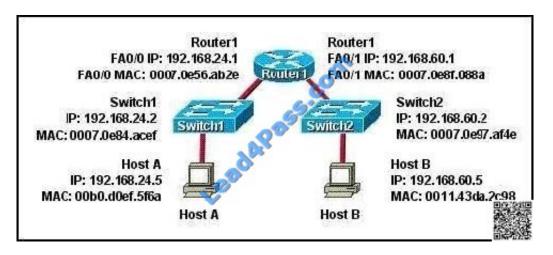



https://www.lead4pass.com/640-822.html

2021 Latest lead4pass 640-822 PDF and VCE dumps Download

Host A needs to send data to Host B. Which Layer 2 and 3 destination addresses will be used to send the data from Host A to Host B?

A. 192.168.24.1 and 0007.0e56.ab2e

B. 192.168.60.5 and 0011.43da.2c98

C. 192.168.24.2 and 0007.0e84.acef

D. 192.168.60.5 and 0007.0e56.ab2e

Correct Answer: D

Latest 640-822 Dumps

640-822 VCE Dumps

640-822 Practice Test

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.lead4pass.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © lead4pass, All Rights Reserved.