

# 640-822<sup>Q&As</sup>

Interconnecting Cisco Networking Devices Part 1

## Pass Cisco 640-822 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.lead4pass.com/640-822.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



### https://www.lead4pass.com/640-822.html

### **QUESTION 1**

What two things does a router do when it forwards a packet? (Choose two.)

- A. switches the packet to the appropriate outgoing interfaces
- B. computes the destination host address
- C. determines the next hop on the path
- D. updates the destination IP address
- E. forwards ARP requests

Correct Answer: AC

### **QUESTION 2**

When should the "clock rate" command be used on a Cisco router\\'s interface?

- A. During diagnostic functions such as a loopback test
- B. When the router is directly connected to another Cisco router
- C. When the router is connected to a Frame Relay switch
- D. When the interface is connected to a CSU/DSU

Correct Answer: B

### **QUESTION 3**

Which of the following are characteristics of a Frame Relay point-to-point subinterface? (Choose two.)

- A. requires use of Inverse ARP
- B. resolves NBMA split horizon issues
- C. requires the frame-relay map command
- D. maps one IP subnet per DLCI
- E. maps one IP subnet across multiple DLCIs

Correct Answer: BD

**QUESTION 4** 

What is the purpose of the switchport command?



### https://www.lead4pass.com/640-822.html

2021 Latest lead4pass 640-822 PDF and VCE dumps Download

Switch(config-if)# switchport port-security maximum 1 Switch(config-if)# switchport port-security mac- address 0018.DE8B.4BF8

A. It ensures that only the device with the MAC address 0018.DE8B.4BF8 will be able to connect to the port that is being configured.

B. It informs the switch that traffic destined for MAC address 0018.DE8B.4BF8 should only be sent to the port that is being configured.


C. It will act like an access list and the port will filter packets that have a source or destination MAC of 0018.DE8B.4BF8.

D. The switch will shut down the port of any traffic with source MAC address of 0018.DE8B.4BF8.

Correct Answer: A

### **QUESTION 5**

Refer to the exhibit.

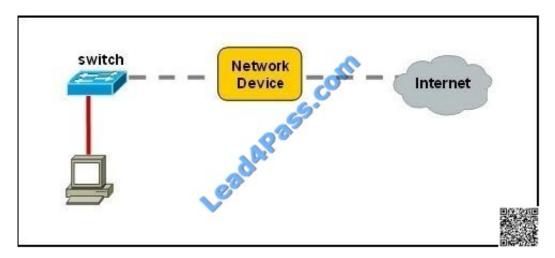

A network device needs to be installed in the place of the icon labeled Network Device to accommodate a leased line attachment to the Internet. Which network device and interface configuration meets the minimum requirements for this installation?

A. a router with two Ethernet interfaces

B. a switch with two Ethernet interfaces

C. a router with one Ethernet and one serial interface

D. a switch with one Ethernet and one serial interface

E. a router with one Ethernet and one modem interface

Correct Answer: C

640-822 PDF Dumps

640-822 Practice Test

640-822 Braindumps

To Read the Whole Q&As, please purchase the Complete Version from Our website.

# Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

**Instant Download After Purchase** 

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.lead4pass.com/allproducts

### **Need Help**

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © lead4pass, All Rights Reserved.