

## HP2-Z34<sup>Q&As</sup>

Building HP FlexFabric Data Centers

**Pass HP HP2-Z34 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/hp2-z34.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit A company added a second data center IRF 1 and IRF 2 connect on direct Ethernet cables. What is the simplest, most flexible and resilient option for the data center connection?

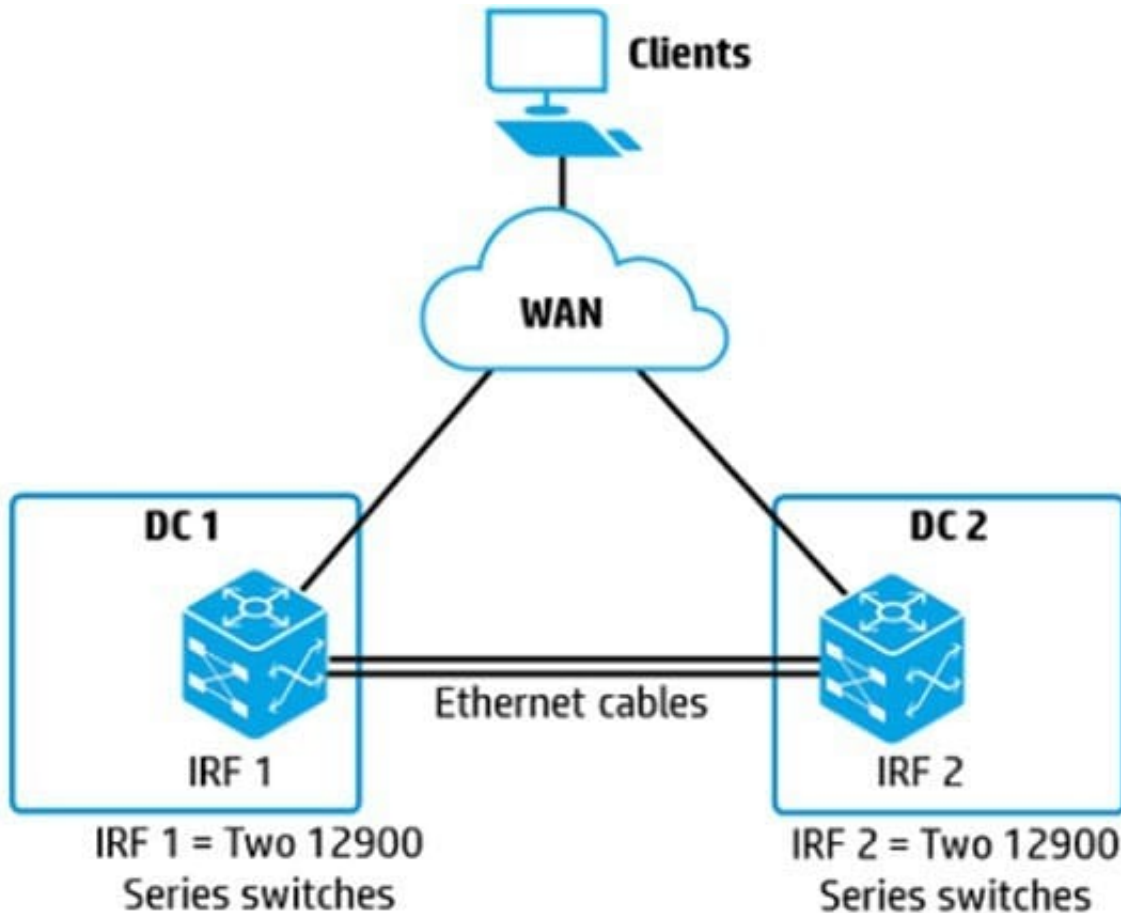


- A. link aggregation between IRF 1 and IRF 2
- B. VPLS solution between IRF 1 and IRF 2
- C. EVI network between IRF 1 and IRF 2
- D. IRF 1 and IRF 2 combined into a single IRF virtual device

Correct Answer: B

**QUESTION 2**

Refer to the exhibit

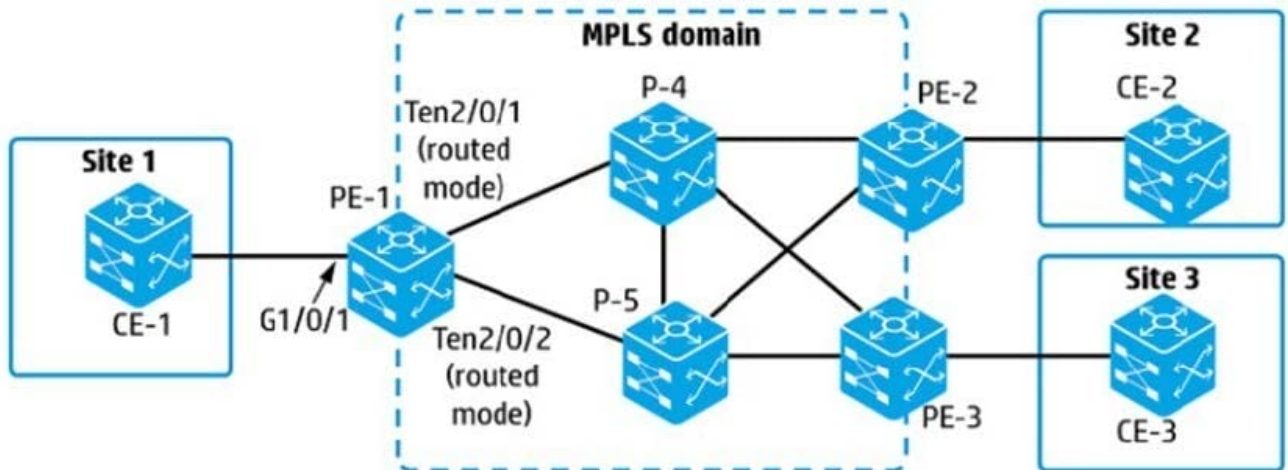

An administrator is setting up an MPLS Layer 2 VPN between customer Sites 1 and 2 and is defining the pseudo wire (PW) ID for this purpose. How should the PW IDs and router values be configured?

- A. Set the PW ID to a different value on PE-1 and PE-2 The value on each router must match the label advertised by the peer for its loopback address.
- B. Set the PW ID to a different value on PE-1 and PE-2 Also use a different value from other PWs on these routers.
- C. Set the PW ID to the same value on PE-1 and PE-2. Use a different value from other PWs on these routers.
- D. Set the PW ID to the same value on PE-1 and PE-2. The value on each router must match the S-VLAN ID for the associated service instance.

Correct Answer: D

### QUESTION 3

An HP Comware Switch 1 supports FCoE for connected servers with Converged Network Adapters (CNAs). On interface Ten 1/0/1 Switch 1 sends FCoE traffic in VSAN 2 to an upstream switch. Switch 2 which also supports FCoE What is the correct configuration for interface Ten 1/0/1?

- A. FC trunk port, which permits VSAN 2
- B. bound to a VFC interface, which is a trunk port and permits VSAN 2
- C. bound to a VFC interface, which is an access port in VSAN 2
- D. FC access port in VSAN 2

Correct Answer: C

### QUESTION 4

An HP Comware switch supports FCoE in Fibre Channel Forwarder (FCF) mode. A switch interface Ten1/0/1 connects to a server FCoE Converged Network Adapter (CNA). The CNA transmits normal data traffic, which is tagged for VLANs 4 and 8. and storage traffic for VSAN 2, which is associated with VLAN

20. What is a correct port type and VLAN configuration for Ten 1/0/1?

- A. a hybrid port that has PVID 1 and defines VLANs 4 and 8 as tagged
- B. a trunk port that has PVID 20 and permits VLANs 4, 8, and 20
- C. a hybrid port that has PVID 1, defines VLAN 20 as untagged, and defines VLANs 4 and 8 as tagged
- D. a trunk port that has PVID 1 and permits VLANs 4, 8, and 20

Correct Answer: D

---

## QUESTION 5

To provide redundancy, a company has multiple data centers that use server virtualization. What is a networking requirement for this scenario?

- A. less bandwidth at the server access layer and more bandwidth at the distribution layer than in a nonvirtualized network
- B. physical network segmentation and isolation implemented at Layers 1 through 7
- C. localized storage volumes that are isolated within each data center
- D. extension of Layer 2 connectivity across the data centers

Correct Answer: D

[Latest HP2-Z34 Dumps](#)

[HP2-Z34 Exam Questions](#)

[HP2-Z34 Braindumps](#)