

5V0-41.20^{Q&As}

VMware SD-WAN Troubleshoot





Pass VMware 5V0-41.20 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.lead4pass.com/5v0-41-20.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by VMware
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers




QUESTION 1

Scenario 3:

After resolving numerous connectivity issues throughout the various branch sites, connectivity between applications and users is finally present. The network administrator is informed that during certain tests, applications are not performing as they are expected to. Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.

Exhibit.

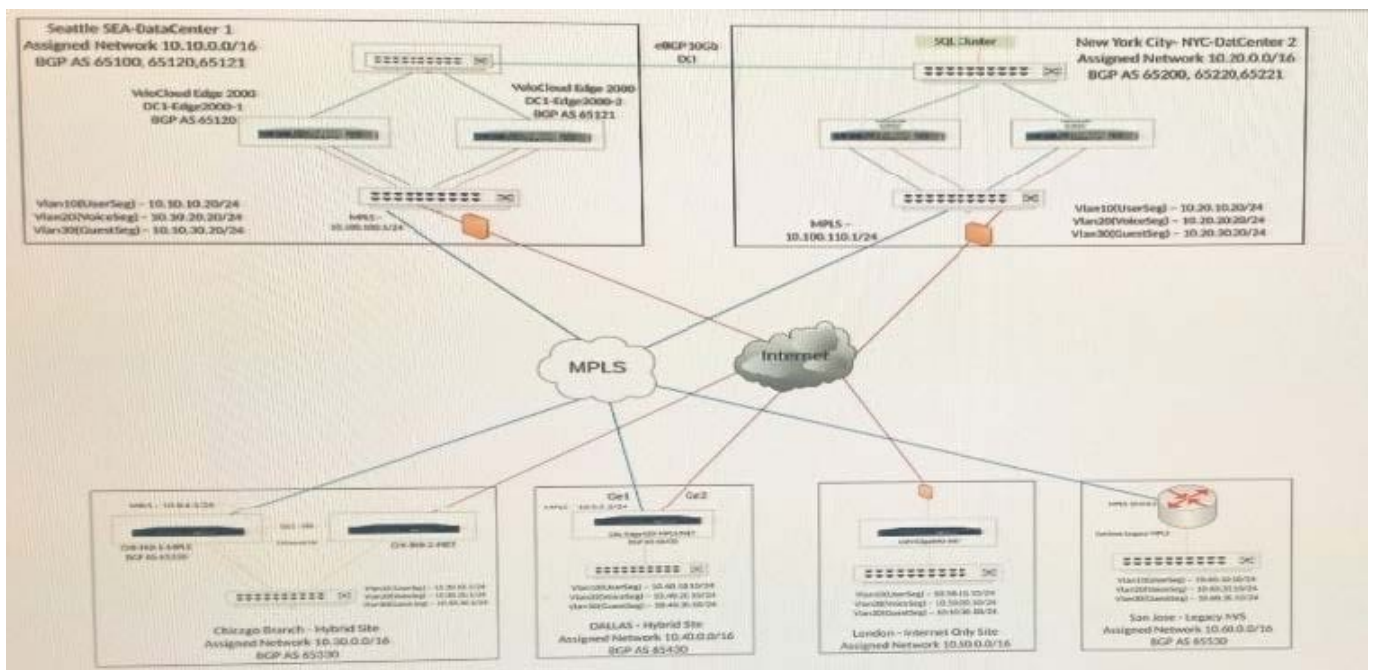

A network administrator is receiving complaints that a real-time voice application is not performing well, with choppy audio, and dead audio especially during peak traffic times.

What two actions can the administrator take to diagnose and fix the issue? (Choose two.)

- A. Configure a QoS policy to rate limit all traffic during peak times.
- B. Ensure that the realtime application is matching the correct application type using the diagnostics page.
- C. Check the status of the links using the QoE and Transport tabs for any degraded underlay issues or congestion issues.
- D. Configure a QoS policy to load balance the realtime traffic across all links.


Correct Answer: AC

QUESTION 2

Scenario 2:

After completing the branch activation for all required branches, the network administrator attempts to test connectivity between the various branches and between hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the some applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

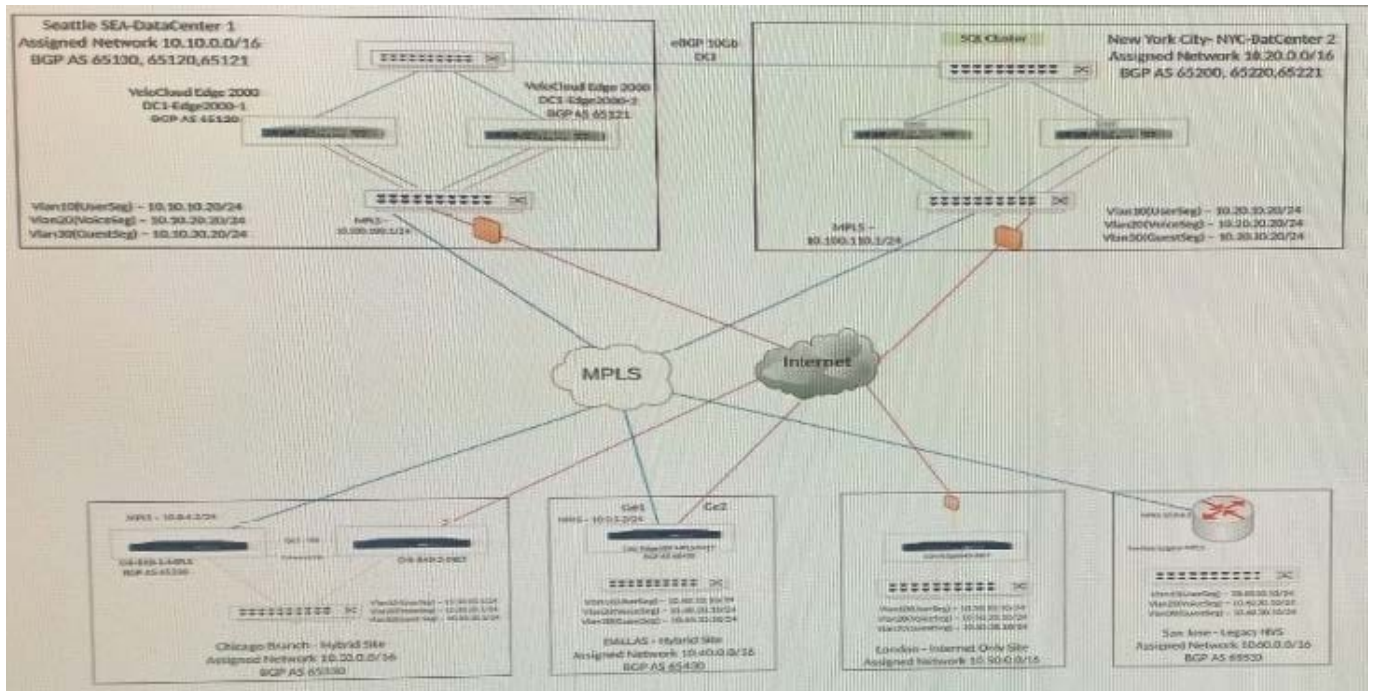

A technician has added Edges to an East Coast Profile. These Edges are not able to communicate via dynamic tunnels to Edges in the West_Coast profile. The technician has noticed that some Edges are able to establish dynamic tunnels.

What could be preventing Edges from being able to establish dynamic tunnels?

- A. The profiles are not configured to allow dynamic branch to branch VPNs.
- B. The profiles are configured to only allow dynamic branch to branch for Edges within the same profile.
- C. None of the existing profiles have Cloud VPN enabled thus preventing dynamic tunnels.
- D. Neither profile has been configured to utilize cloud gateways.


Correct Answer: B

QUESTION 3

Scenario 1:

A network administrator is tasked! with enabling SO-WAN at three branch locations. A topology has been provided for reference. For each site, the administrator is having issues bringing edges online, as another administrator has gone ahead and created a configuration ahead of time. The organization has several branch sites- One is an Internet- only site and two are Hybrid locations with both internet and MPLS: The last location is MPLS only. There are hub data center locations in this environment as well. Please refer to the topology.

Exhibit.

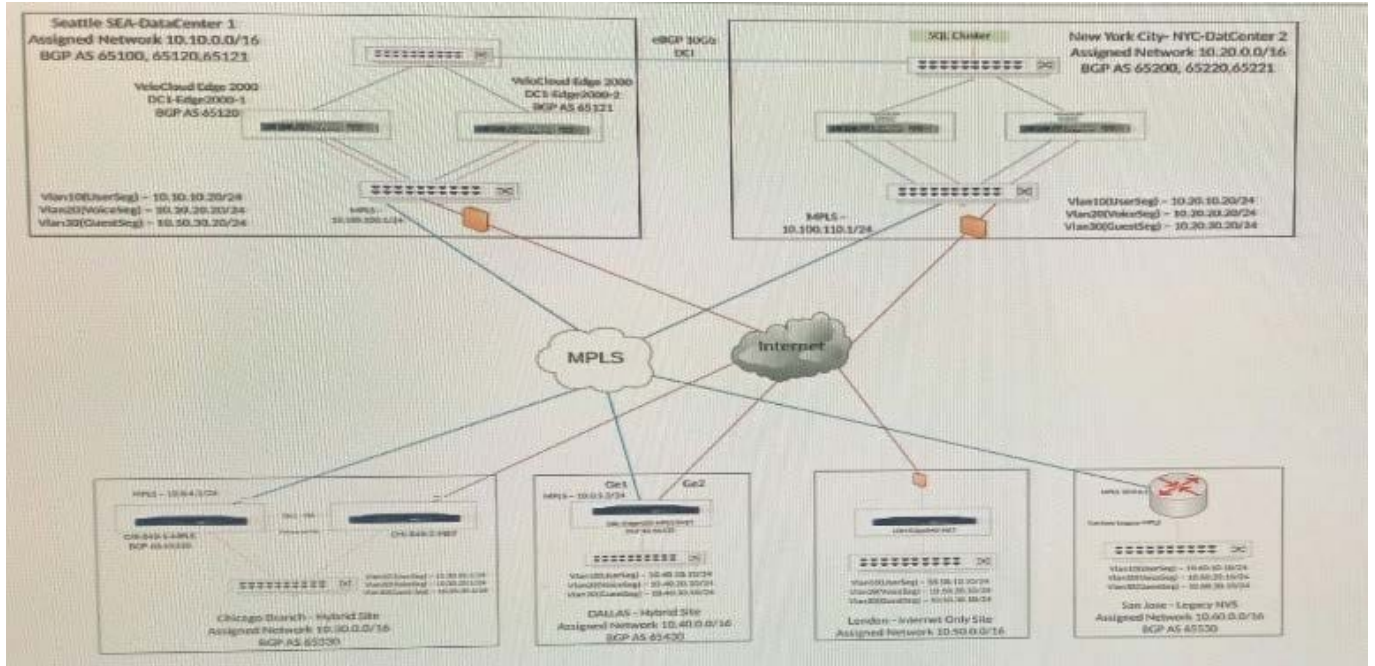

An administrator is attempting to activate two Edge devices at the Chicago branch location. The local technician reports that the Edge devices are not coming online. The Edge devices have been plugged in, powered on, and connected to the correct circuits with an Enhanced HA setup.

What should the local technician check first when troubleshooting the issue?

- A. Verify beep sequence of the Edge devices.
- B. Review color of the LED.
- C. Review the Orchestrator for HA misconfiguration issues.
- D. Verify the link light sequence of the HA ports.

Correct Answer: B


QUESTION 4

Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources.

The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

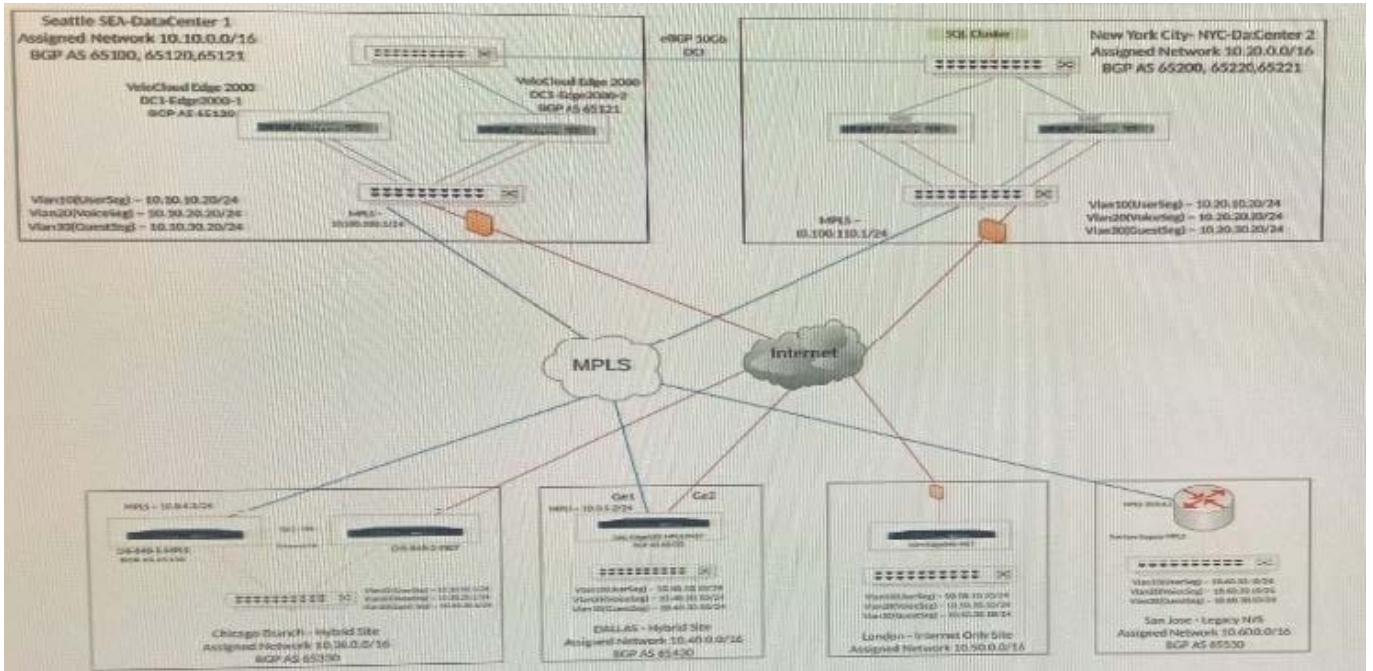

The tunnel from spoke to hub is not coming up. What are the two possible reasons? (Choose two.)

- A. Spoke Edge and hub Edge are two different Edge models.
- B. Spoke Edge and hub Edge have a mismatch certificate authentication mode.
- C. Hub WAN Interface might be behind the NAT Device or firewall.
- D. Dynamic Branch to Branch is not enabled.


Correct Answer: BC

QUESTION 5

Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

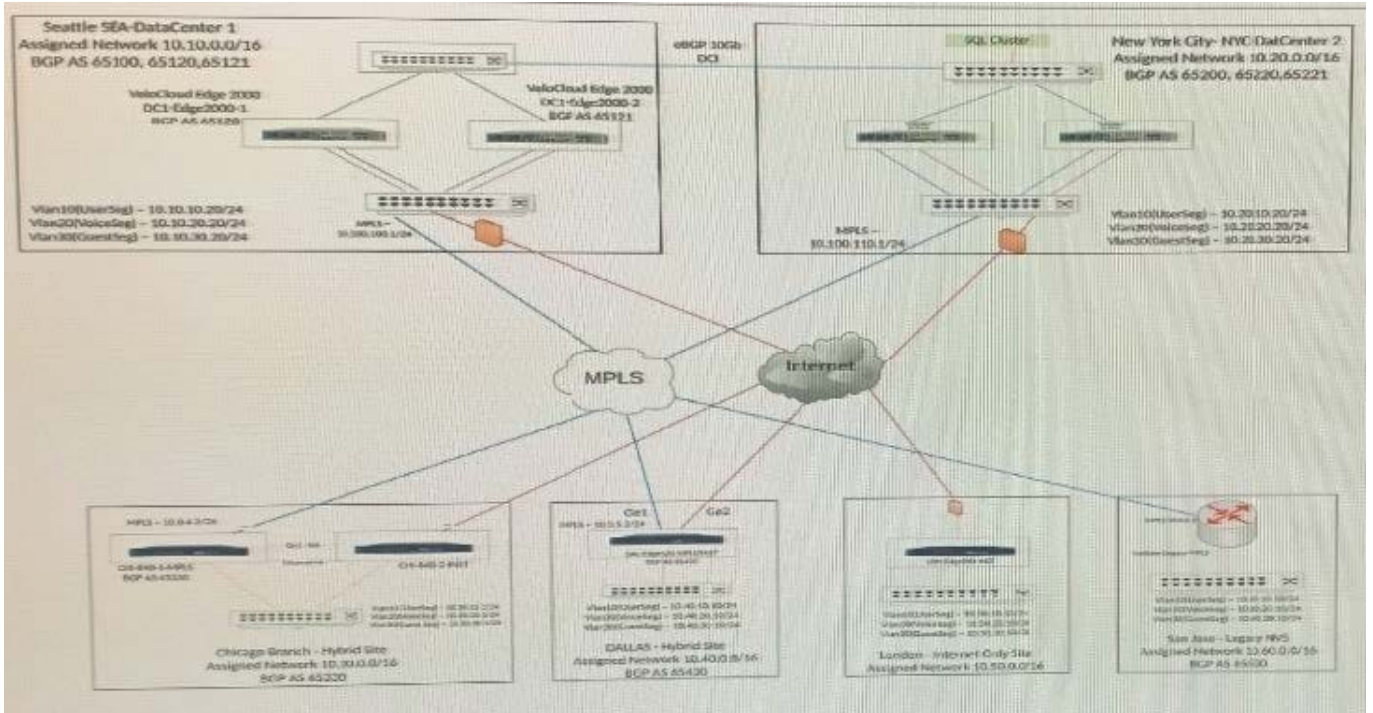

After deploying the Edge, the security team has determined that traffic from Guest wireless traffic is able to reach resources in the Production network. There should be absolutely no interaction.

How can this be prevented?

- A. Create an additional segment for Guest wireless traffic and leave the Production traffic in the default global segment.
- B. Segmentation is currently not supported on VeloCloud Edge.
- C. Create two subnets, one for Guest wireless traffic and another one for Production traffic.
- D. Have Guest wireless and Production traffic in the same segment but different VLANs.

Correct Answer: A

[Latest 5V0-41.20 Dumps](#)

[5V0-41.20 Practice Test](#)

[5V0-41.20 Study Guide](#)