

HP2-Z30^{Q&As}

Fast Track - Applying HP FlexNetwork Fundamentals





Pass HP HP2-Z30 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/hp2-z30.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

What are the correct factory default settings when the HP Comware and Provision switches are originally booted?

- A. Provision and Comware switches have Telnet enabled.
- B. Provision and Comware switches have all Layer 2 interfaces disabled.
- C. Provision and Comware switches have default passwords defined.
- D. Provision and Comware switches have Layer 3 switching disabled.

Correct Answer: D

QUESTION 2

Which statement is true about the management of HP ProVision and Comware switches?

- A. Telnet SSH are enabled by default on Comware switches.
- B. Telnet is enabled but SSH is disabled on ProVision switches.
- C. Comware switches, by default, store usernames and passwords in a separate configuration file.
- D. ProVision switches, by default, store usernames and passwords in a separate configuration file.

Correct Answer: D

QUESTION 3

A network administrator acquires a new HP Comware switch from HP with the factory default settings. The network administrator logs into the console port and configures the following information: user-interface aux0 quit super password level 0 simple hp0 super password level 1 simple hpl super password level 2 simple hp2 super password level 3 simple hp3 What happens the next time the network administrator logs into the console?

- A. The network administrator is immediately taken to level 3 with no password prompted.
- B. The network administrator must enter a password of hp3.
- C. The network administrator must perform the password recovery procedure because it was incorrectly configured.
- D. The network administrator must enter a password of hp0.

Correct Answer: B

QUESTION 4

Refer to the partial command output:

```
[Comware] display link-aggregation verbose bridge-aggregation 2
Loadsharing Type: Shar -- Loadsharing, NonS -- Non-Loadsharing
Port Status: S -- Selected, U -- Unselected
Flags: A -- LACP_Activity, B -- LACP_Timeout, C -- Aggregation,
       D -- Synchronization, E -- Collecting, F -- Distributing,
       G -- Defaulted, H -- Expired

Aggregation Interface: Bridge-Aggregation2  Aggregation Mode: Dynamic
Loadsharing Type: Shar
System ID: 0x8000, 000f-e267-6c6a
```

Local:

Port	Status	Priority	Oper-Key	Flag
GE1/0/3	S	32768	2	{ACDEF}
GE1/0/4	S	32768	2	{ACDEF}

Remote:


Actor	Partner	Priority	Oper-Key	SystemID	Flag
GE1/0/3	32	32768	2	0x8000, 000f-e267-57ad	{ACDEF}
GE1/0/4	26	32768	2	0x8000, 000f-e267-57ad	{ACDEF}

Based on this output, which statement is true?

- A. Dynamic LACP is used, and load sharing is functioning correctly.
- B. Static LACP is used, and load sharing has failed.
- C. Dynamic LACP is used, and load sharing has failed.
- D. Static LACP is used, and load sharing is functioning correctly.

Correct Answer: B

QUESTION 5

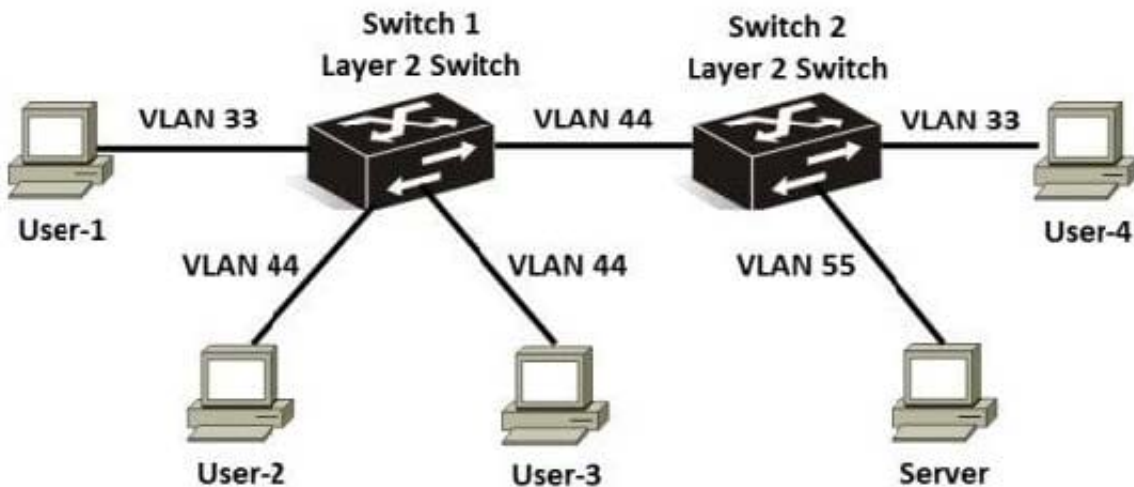

Switch 1 and Switch 2 are HP ProVision switches operating as Layer 2 switches. VLAN 33 has been defined as the management VLAN on both switches. Based on this topology, which user devices can access Switch 1 by using SSH?

- A. only User-1, User-2, and the Server
- B. only User-1
- C. all users and servers in the topology
- D. only User-1 and User-2

Correct Answer: B

[HP2-Z30 VCE Dumps](#)

[HP2-Z30 Practice Test](#)

[HP2-Z30 Braindumps](#)