

## HP2-Z34<sup>Q&As</sup>

Building HP FlexFabric Data Centers

**Pass HP HP2-Z34 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/hp2-z34.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

An administrator configures an HP Comware switch to support FCoE in Fibre Channel Forwarder (FCF) mode. A switch interface connects to a server Converged Network Adapter (CNA) which sends normal data and storage traffic. What is the correct configuration for this port?

- A. FC port in NP mode
- B. bound to a VFC interface, which is in F mode
- C. bound to a VFC interface, which is in E mode
- D. FC port in F mode

Correct Answer: A

---

**QUESTION 2**

What is an appropriate situation for configuring an interface as a silent TRILL access port?

- A. The interface connects to another TRILL switch, which has a higher DRB priority than this switch
- B. The interface connects to a downstream non-TRILL switch, which is connected to another TRILL switch. The administrator does not want the interface to carry encapsulated TRILL traffic.
- C. The interface connects to a downstream non-TRILL switch, which is connected to another TRILL switch. The administrator wants the interface to provide a backup path for encapsulated TRILL traffic
- D. The interface connects directly to server NICs, and it is a bridge aggregation on an IRF virtual device.

Correct Answer: A

---

**QUESTION 3**

A company is adding a second data center for disaster recovery. The data centers connect over a link supplied by a service provider with an IP network. The company wants a solution that extends Layer 2 connectivity between the data centers and does not require any special services from the service provider, such as MPLS.

What can meet the needs for this design?

- A. QEVI
- B. IRF
- C. VPLS
- D. SPBM

Correct Answer: B

---

## QUESTION 4


An administrator is configuring an HP switch to run SPBM. Which Spanning Tree Protocol (STP) configuration is required?

- A. Disable STP.
- B. Ensure that the switch with the lowest IS-IS router ID has the lowest bridge priority.
- C. Set the spanning tree mode to ECT.
- D. Map all B-VLANs to MSTP instance 4092

Correct Answer: D

## QUESTION 5

Refer to the exhibit These switches form an SPBM region. What is required for load balancing to occur across the links between these switches?

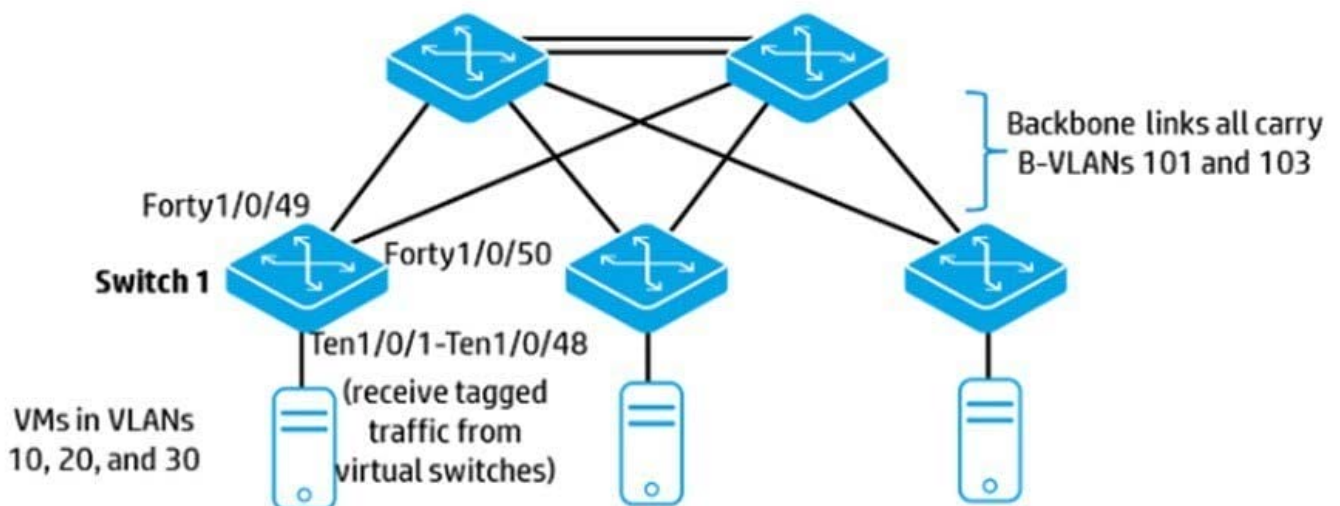

- A. IS-IS cost for each backbone link must be the same (with IS-IS ECMP enabled).
- B. B-VLANs must be configured to use different ECT algorithms.
- C. Tandem multicast mode must be enabled globally
- D. B-VLANs must be assigned to different MSTP instances.

Correct Answer: C