

## JN0-363<sup>Q&As</sup>

Service Provider Routing and Switching Specialist (JNCIS-SP)

### Pass Juniper JN0-363 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/jn0-363.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



## QUESTION 1

You have created a routing instance named vr3 that will provide access to Server 2 (10.0.0.2) (or the hosts on the 10.10.10.0/24 network). Which command would you use to test connectivity between vr3 and Server 2?

- A. user@vr3> ping 10.0.0.2 count 5
- B. user@vr3> ping 10.0.0.2 count 5 source 10.10.10.1
- C. user@router1> ping 10.0.0.2 count 5
- D. user@router1> ping 10.0.0.2 routing-instance vr3 count 5

Correct Answer: C

---

## QUESTION 2

Which two interface types are used as tunnel endpoints? (Choose two.)

- A. ae
- B. ip
- C. ge
- D. gr

Correct Answer: BC

---

## QUESTION 3

You want to see a detailed list of all established BGP sessions. In this scenario, what would be a valid command to accomplish this task?


- A. show bgp neighbor
- B. show bgp summary
- C. show route receive-protocol bgp
- D. show route protocol bgp

Correct Answer: D

---

## QUESTION 4

Exhibit

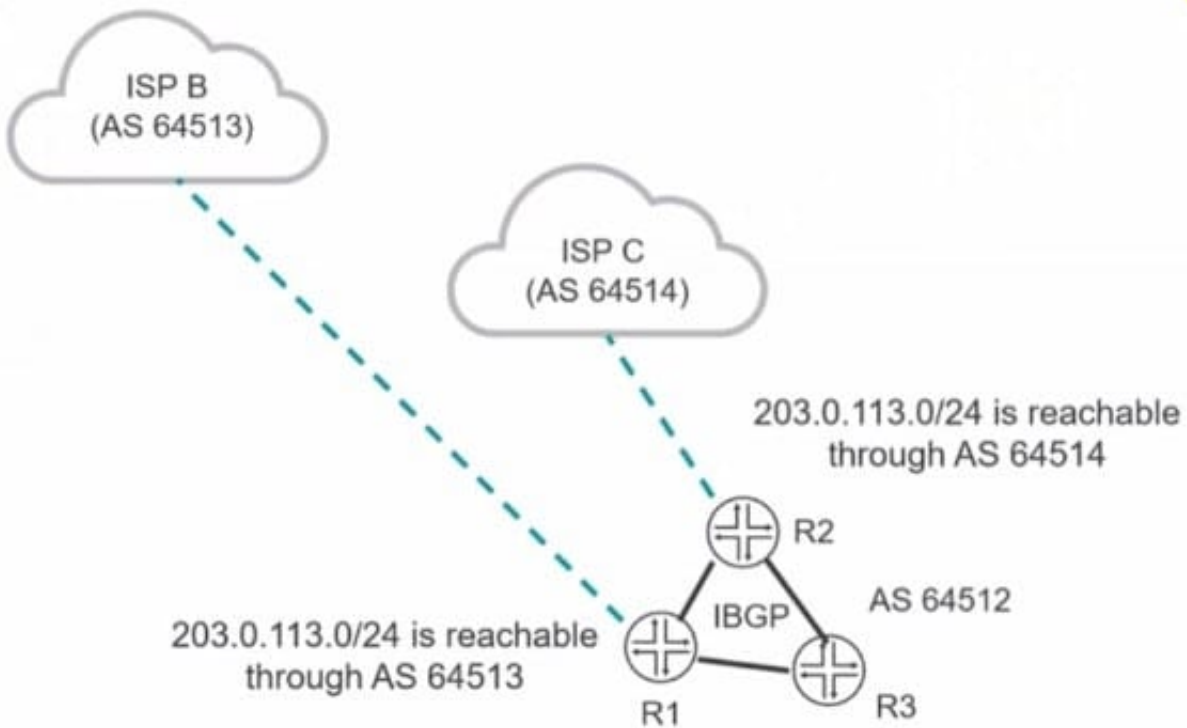

You want the R1 and R3 routers to forward traffic destined to the 203.0.113.0/24 network through R2. Which BGP attribute would you modify to satisfy this requirement?

- A. community
- B. origin
- C. MED
- D. local preference

Correct Answer: C

**QUESTION 5**

Exhibit

```
Exhibit

user@router> show mpls lsp ingress detail
Ingress LSP: 1 sessions
192.168.0.3
  From: 0.0.0.0, State: Dn, ActiveRoute: 0, LSPname: to-R3
  ActivePath: (none)
  LSPTYPE: Static Configured, Penultimate hop popping
  LoadBalance: Random
  Follow destination IGP metric
  Encoding type: Packet, Switching type: Packet, GPID: IPv4
  LSP Self-ping Status : Enabled
  Primary                               State: Dn
  Priorities: 7 0
  SmartOptimizeTimer: 180
  Flap Count: 0
  MBB Count: 0
  Will be enqueued for recomputation in 18 second(s).
  1 Mar  9 23:22:22.998 OSPF: could not determine self
user@router> show ted database
TED database: 0 ISIS nodes 0 INET nodes
[edit protocols]
user@router# show
ospf {
  area 0.0.0.0 {
    interface ge-0/0/2.0;
    interface ge-0/0/4.0;
  }
}
rsvp {
  interface all;
}
bgp {
  group Int {
    type internal;
    local-address 192.168.0.1;
    export nhs;
    neighbor 192.168.0.3;
  }
}
mpls {
  label-switched-path to-R3 {
    to 192.168.0.3;
  }
  interface all;
}
```

The LSP is not establishing correctly.

Referring to the exhibit, what should you do to solve the problem?

A. Enable traffic engineering for the OSPF protocol.

- B. Enable traffic engineering for the IS-IS protocol.
- C. Enable traffic engineering for the BGP protocol.
- D. Enable traffic engineering for the RSVP protocol.

Correct Answer: D

[Latest JN0-363 Dumps](#)

[JN0-363 Study Guide](#)

[JN0-363 Exam Questions](#)