

## NS0-181<sup>Q&As</sup>

NetApp Certified Storage Installation Engineer - ONTAP 9.1

### Pass NetApp NS0-181 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/ns0-181.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by NetApp  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Click the Exhibit button.

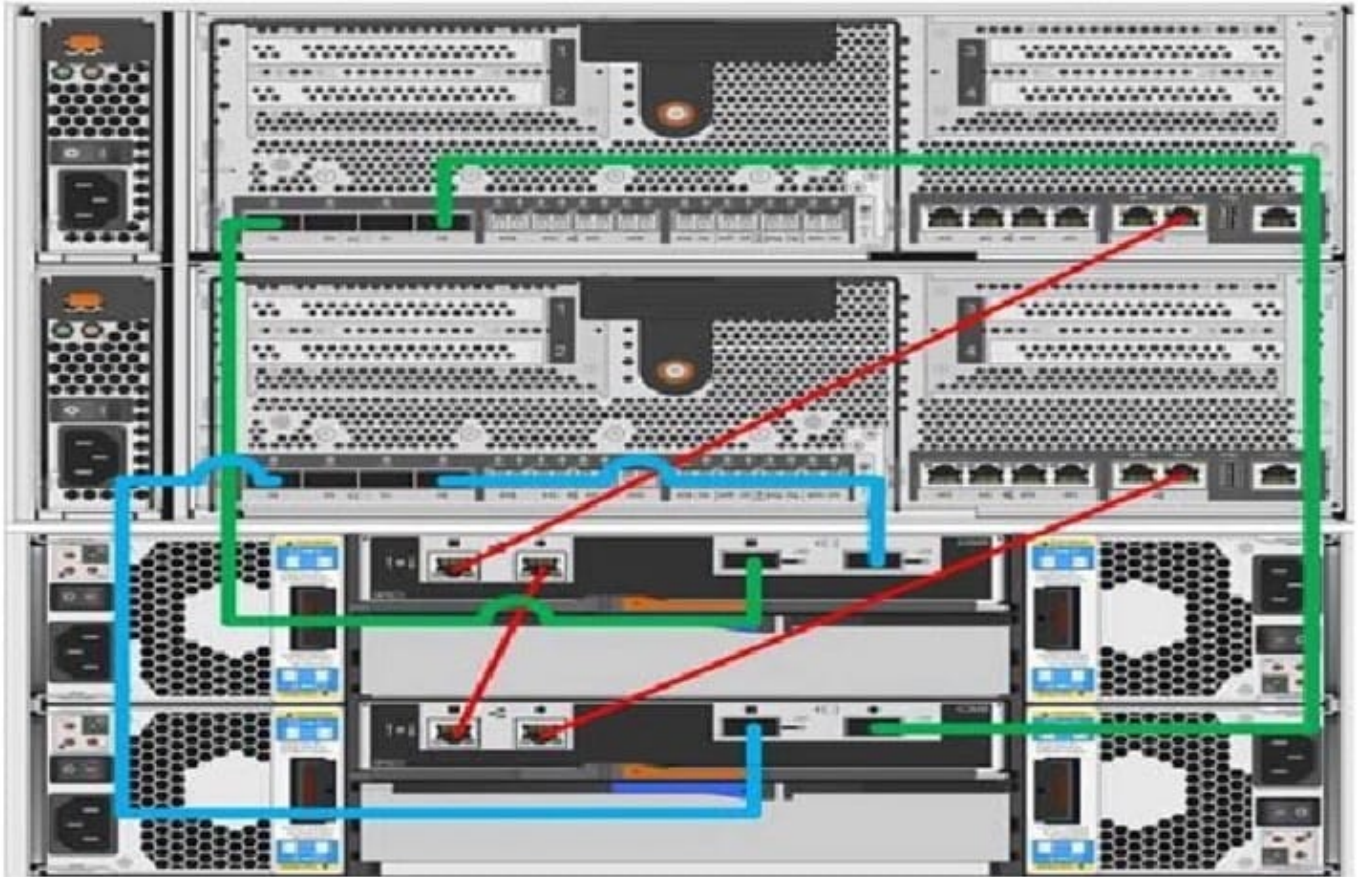

You are adding new DS224C shelves in a new stack to your cluster with FAS8060 controllers running ONTAP 9.7.

Referring to the exhibit, which two actions should be performed to the cluster before installing the new shelves?  
(Choose two.)

- A. Move the SAS cables to a new stack.
- B. Enable in-band ACP.
- C. Remove the Ethernet cables.
- D. Disable out-of-band ACP.

Correct Answer: AD

**QUESTION 2**

You are installing a new ONTAP 9.7 cluster and attaching the cluster to two separate networks. Your customer has indicated that the same range of client IP addresses are used on both networks and that the networks are never allowed to communicate with each other.

In this scenario, which ONTAP feature must be configured to securely allow all clients to access ONTAP NAS protocols?

- A. BGP
- B. broadcast domains
- C. routing
- D. IPspaces

Correct Answer: B

Reference: <https://www.netapp.com/media/16885-tr-4182.pdf> (9)

---

### QUESTION 3

You are installing a 4-node AFF A400 cluster and are asked to create a custom security message before and after user login. Which two security features are used to perform this task? (Choose two.)

- A. EMS
- B. banner
- C. motd
- D. AutoSupport

Correct Answer: BD

---

### QUESTION 4

You are asked to add a new HA pair to an existing 2-node switchless AFF A220 cluster. You must first convert to a 2-node switched cluster using Broadcom BES-53248 cluster switches. Which two conditions must be fulfilled before you start the migration? (Choose two.)

- A. All cluster LIFs must be in the up state and on their home ports.
- B. The "Enabled Switchless Cluster" option must be manually set to "false".
- C. All cluster LIFs must have an MTU size of 1500.
- D. The 2-node switchless configuration must be properly set up and functioning.


Correct Answer: AD

Reference: <https://docs.netapp.com/platstor/index.jsp?topic=%2Fcom.netapp.doc.hw-sw-ix8-migrate-2n%2FGUID-81FD5EDF-8902-40EA-9050-69358426CB6F.html>

---

### QUESTION 5

Click the Exhibit button.

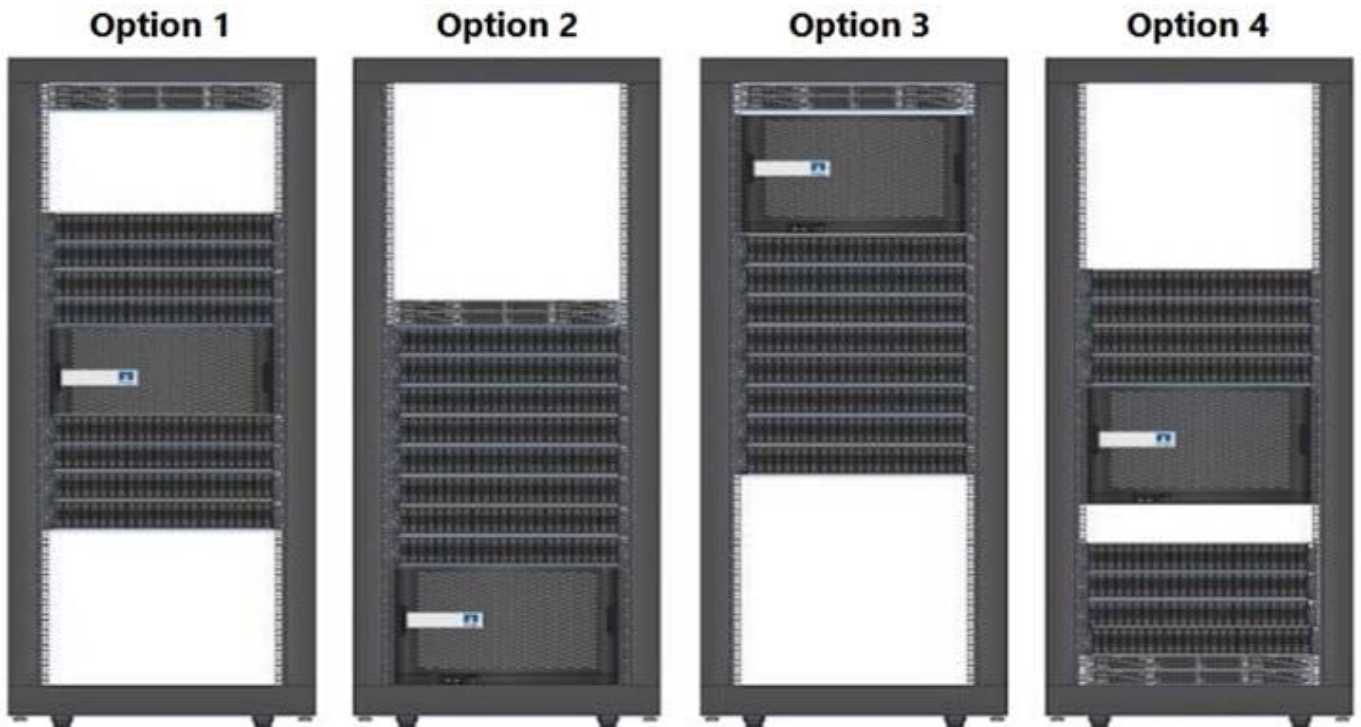

You are setting up a new AFF A700 into a new rack at a customer's site. The customer asks you to plan for simplified future growth. Referring to the exhibit, how would you satisfy this requirement?

- A. Option 4
- B. Option 2
- C. Option 3
- D. Option 1

Correct Answer: B

[Latest NS0-181 Dumps](#)

[NS0-181 PDF Dumps](#)

[NS0-181 Practice Test](#)