

NS0-181^{Q&As}

NetApp Certified Storage Installation Engineer - ONTAP 9.1

Pass NetApp NS0-181 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/ns0-181.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

After completing the installation of an AFF A800 ONTAP AI cluster, you are asked which contacts are available for additional help in obtaining immediate assistance in solving P1 issues. In this scenario, what do you tell the customer?

- A. Contact NetApp Support using chat.
- B. Use Guided Problem Solving.
- C. Contact NetApp Support by telephone.
- D. Use the NetApp KB TV channel.

Correct Answer: C

QUESTION 2

You are adding new controllers to an existing cluster. As part of the upgrade process, you have updated the BES-53248 cluster switches. In this scenario. Which two commands would you use to verify a healthy cluster after the upgrade? (Choose two.)


- A. network port show -ipspace Cluster
- B. network interface show -vserver Cluster
- C. network device-discovery show -protocol cdp
- D. network interface show -vserver Cluster -fields auto-revert

Correct Answer: AB

Reference: <https://docs.netapp.com/platstor/index.jsp?topic=%2Fcom.netapp.doc.hw-sw-ix8-setup%2FGUID-340F5F50-FFDA-4B5C-A151-007CF9D6063B.html>

QUESTION 3

Click the Exhibit button.

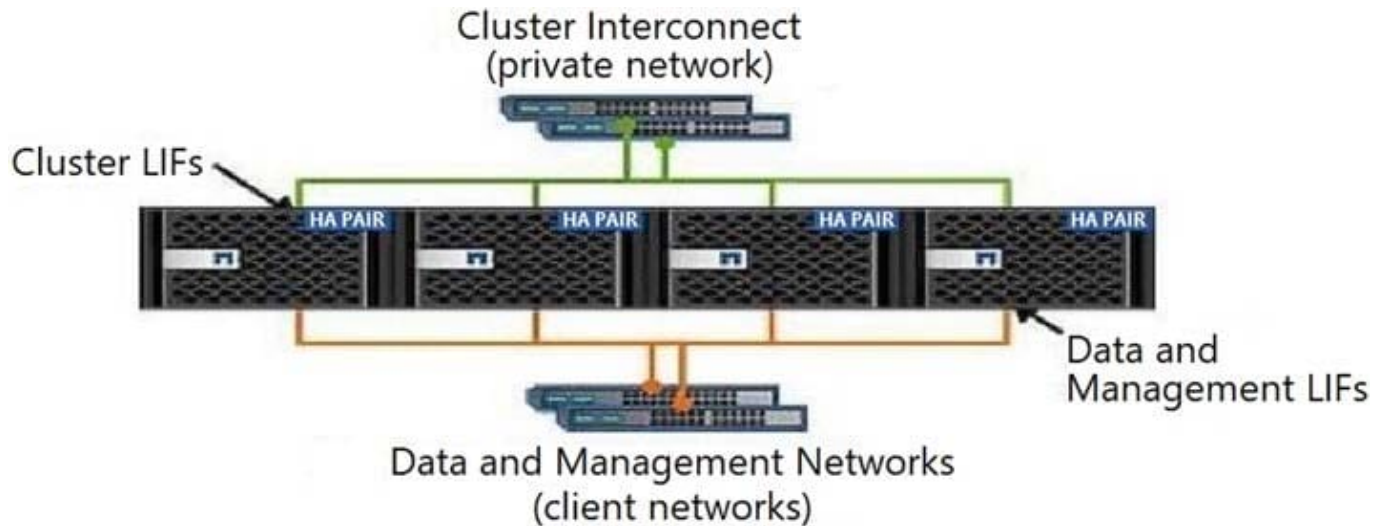

As shown in the exhibit, you have an 8-node ONTAP 9.7 cluster. You are asked to set up a SnapMirror volume relationship between node-1 and node-8 in the same cluster. In this scenario, which two network components are used by the SnapMirror volume? (Choose two.)

- A. private network
- B. cluster LIFs
- C. client network
- D. management LIFs

Correct Answer: AB

QUESTION 4

You are installing a new AFF A400 cluster that is running ONTAP 9.7 software. You are asked to attach an Amazon S3 cloud tier for FabricPool technology. In this scenario, which two NetApp License File (NLF) types are supported for cloud tiering? (Choose two.)

- A. term-based
- B. perpetual
- C. base
- D. master

Correct Answer: AB

Reference: <https://www.netapp.com/pdf.html?item=/media/17239-tr4598pdf.pdf> (10)

QUESTION 5

While installing a new AFF A400 HA pair, you are unable to add an NTP server from another subnet. You are able to

ping the NTP server from the new cluster. In this scenario, what are two causes of this problem? (Choose two.)

- A. The admin SVM has the wrong gateway.
- B. A firewall is blocking port 123.
- C. The time skew is too great.
- D. The cluster management LIF needs to be in a different IPspace.

Correct Answer: AD

QUESTION 6

A customer has a current AFF ASA A700 cluster and they want to expand the cluster by adding a second AFF ASA A700 HA pair. In this scenario, which step would be required to accomplish this task?

- A. Install a BES-53248 cluster switch and convert the AFF ASA A700 from a switchless to switch cluster.
- B. Enable ALUA between the two HA pairs to allow cluster backend traffic.
- C. The customer will need to create a separate cluster for the second AFF ASA A700 pair.
- D. Install a Brocade FC switch and create zoning between the original cluster and the new cluster.

Correct Answer: A

QUESTION 7

You want to verify that connections are cables correctly and that shelf IDs are unique within an HA pair. Which tool would be used to accomplish these tasks?

- A. System Diagnostics
- B. Cloud Insights
- C. Active IQ Config Advisor
- D. Active IQ Unified Manager

Correct Answer: A

QUESTION 8

You installed a new pair of Cisco 92300YC cluster switches at a customer's site. Before you install any files on the switch, you want to view the current configuration. In this scenario, which command would you use to accomplish this task?

- A. switchcfgshow
- B. fabricshow

C. config show

D. show running-config

Correct Answer: A

QUESTION 9

Click the Exhibit button.

```
Welcome to node setup.
```

```
You can enter the following commands at any time:
```

```
"help" or "?" - if you want to have a question clarified,
```

```
"back" - if you want to change previously answered questions, and
```

```
"exit" or "quit" - if you want to quit the setup wizard.
```

```
Any changes you made before quitting will be saved.
```

```
To accept a default or omit a question, do not enter a value.
```

```
Enter the node management interface port [e0c]:
```

You want to add a FAS2750 HA pair to an existing 6-node cluster.

Referring to the exhibit, which action would you perform to begin adding the node?

- A. Use the back command to begin the Cluster Setup wizard.
- B. Reboot the node and enter maintenance mode and run the Cluster Setup wizard.
- C. Use the node setup wizard and select 0a as the management interface.
- D. Use the exit or quit commands then run the cluster setup command.

Correct Answer: C

Reference: <http://docs.netapp.com/ontap-9/topic/com.netapp.doc.dot-cm-sag/System%20administration.pdf> (35)

QUESTION 10

You are installing a 4-node AFF A400 cluster and are asked to create a custom security message before and after user login. Which two security features are used to perform this task? (Choose two.)

- A. EMS
- B. banner
- C. motd
- D. AutoSupport

Correct Answer: BD

[NS0-181 PDF Dumps](#)

[NS0-181 Study Guide](#)

[NS0-181 Exam Questions](#)