

MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

A RAML specification is defined to manage customers with a unique identifier for each customer record. What URI does MuleSoft recommend to uniquely access the customer identified with the unique ID 1234?

- A. /customers?custid=trueandcustid=1234
- B. /customers/1234
- C. /customers/custid=1234
- D. /customers?operation=getandcustid=1234

Correct Answer: B

QUESTION 2

What is the correct syntax to reference a fragment in RAML?

- A. examples: #include examples/BankAccountsExample.raml
- B. examples: \$include examples/BankAccountsExample.raml
- C. examples: ?include examples/BankAccountsExample.raml
- D. examples: !include examples/BankAccountsExample.raml

Correct Answer: D

QUESTION 3

A flow has a JMS Publish consume operation followed by a JMS Publish operation. Both of these operations have the default configurations.

Which operation is asynchronous and which one is synchronous?


- A. Publish consume: Synchronous. Publish: Asynchronous.
- B. Publish consume: Asynchronous. Publish: Synchronous.
- C. Publish consume: Asynchronous. Publish: Asynchronous.
- D. Publish consume: Synchronous. Publish: Synchronous.

Correct Answer: A

QUESTION 4

Refer to the exhibits.

A web client sends a GET request to the HTTP Listener. What response message is returned to the web client?

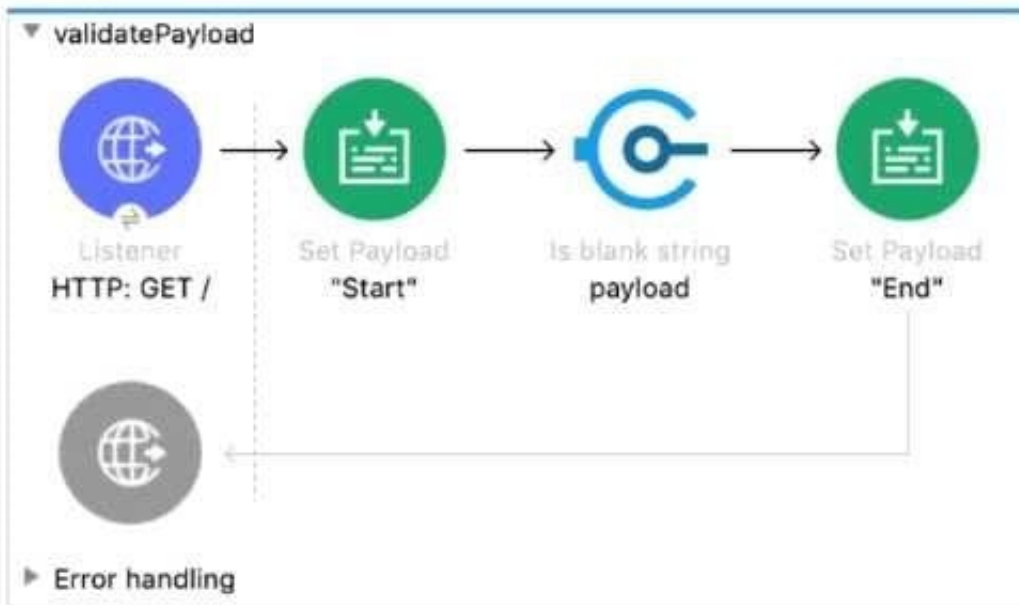

```
<flow name="validatePayload" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" />
  <set-payload value="Start" doc:name="Start" />
  <validation:is-blank-string doc:name="payload" value="#[payload]" />
  <set-payload value="End" doc:name="End" />
</flow>
```

- A. ""
- B. "End"
- C. "Start"
- D. "String is not blank"

Correct Answer: D

QUESTION 5

What MuleSoft API-led connectivity layer is intended to expose part of a backend database without business logic?

- A. Data
- B. System
- C. Process
- D. Experience

Correct Answer: B

[MCD-LEVEL1-DELTA PDF Dumps](#)

[MCD-LEVEL1-DELTA VCE Dumps](#)

[MCD-LEVEL1-DELTA Study Guide](#)