

MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

A Set Variable component saves the current payload to a variable.

What is the DataWeave parent expression to access the variable?

A. #[value]

B. #[vars]

C. #[var]

D. #[values]

Correct Answer: B

QUESTION 2

A web client sends a request to `http://localhost:8081?dept=sales`. What is the correct DataWeave expression to access the value of `dept`?

A. `attributes.queryParams.dept`

B. `attributes.dept`


C. `message.queryParams.dept`

D. `vars.dept`

Correct Answer: A

QUESTION 3

Refer to the exhibits.

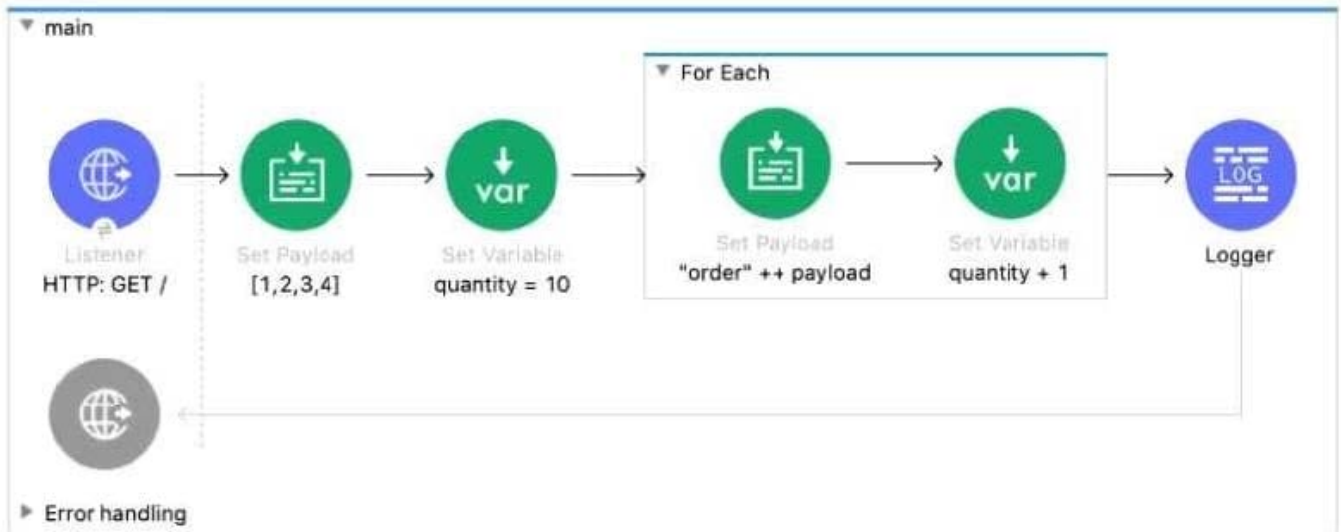

```
<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" allowedMethods="GET"/>
  <set-payload value="#[[1,2,3,4]]" doc:name="[1,2,3,4]" />
  <set-variable value='10' doc:name="quantity = 10" variableName="quantity" />
  <foreach doc:name="For Each" >
    <set-payload value='#["order" ++ payload]' doc:name='"order" ++ payload' />
    <set-variable value="#[vars.quantity + 1]" doc:name="quantity + 1" variableName="quantity" />
  </foreach>
  <logger level="INFO" doc:name="Logger" message='#[[ payload, vars.quantity ]]' />
</flow>
```


What payload and quantity are logged at the end of the main flow?

- A. [[1,2,3,4], 14]
- B. [[order1, order2, order3, order4], 14]
- C. [[1,2,3,4], 10]
- D. [order1order2order3order4,14]

Correct Answer: A

QUESTION 4

Refer to the exhibits.

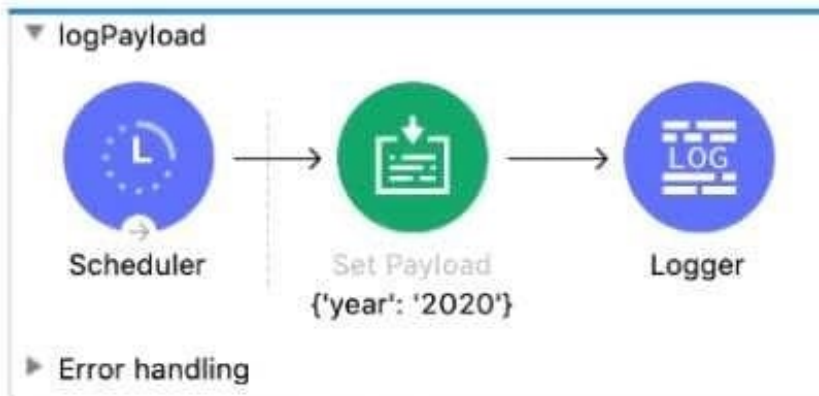

```
<flow name="logPayload" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload value="#[{'year': '2020'}]" doc:name="{ 'year': '2020' }" />
  <logger level="INFO" doc:name="Logger" message=???? />
</flow>
```

The Set Payload transformer's value is set to `{'year': '2020'}`. What message value should be added to the Logger component to output the message `'The year is 2020'`, without hardcoding 2020?

- A. `#[The year is $(payload.year)]*`
- B. `The year is #[payload.year]`
- C. `#[The year is " + payload.year]`
- D. `#[The year is "++ payload.year]`.

Correct Answer: D

QUESTION 5

Where would you create SLA Tiers for an API?

- A. Exchange
- B. API Manager
- C. Anypoint MQ
- D. Within the API

Correct Answer: B

[LEVEL1-DELTA Dumps](#)

[Dumps](#)

[Guide](#)